State of California AIR RESOURCES BOARD

EXECUTIVE ORDER A-9-462 Relating to Certification of New Motor Vehicles

DAIMLERCHRYSLER CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 2000 model-year DaimlerChrysler Corporation exhaust emission control systems are certified as described below for medium-duty vehicles:

Emission Standard Category: Low-Emission Vehicle (LEV)

Fuol Type: Gasoline

Engine Family: YCRXA0360H32 Displacement: 5.9 Liters (360 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

Three Way Catalytic Converter Heated Oxygen Sensors (two) Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The non-methane organic gas (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) LEV certification exhaust emission standards for this engine family in grams per mile are:

Test Weight (lbs.)	Miles	NMOG	_CO_	<u>NOx</u>	нсно	CO (20°F)
3751-5750	50,000	0.160	4.4	0.4	0.018	12.5
	120,000	0.230	6.4	0.6	0.027	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.94

The certification exhaust emission values set forth for NMOG reflect application of a 0.94 RAF for 2000 model-year LEVs. The LEV certification exhaust emission values for this engine family in grams per mile are:

Test Weight (lbs.)	Miles	NMOG	<u>CO</u>	<u>NOx</u>	нсно	CO (20°F)
3751-5750	50,000 120,000	0.131 0.159	2.4 2.8	0.3	0.003 0.004	6.7 n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the medium-duty vehicle phase-in requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles" (Title 13, California Code of Regulations, Section 1960.1(h)(2)).

BE IT FURTHER RESOLVED: That under the submitted medium-duty vehicle phase-in compliance plan, if the manufacturer incurs "Vehicle Equivalent Debits" for the aforementioned model year due to the manufacturer's failure to produce and deliver for sale in California the equivalent quantity of medium-duty vehicles certified to low-emission vehicle and/or ultra-low-emission vehicle exhaust emission standards required by the above-referenced standards and test procedures, all "Vehicle Equivalent Debits" incurred by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model- Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this day of August 1999.

R. B) Summerfield, Chief

Mabile Source Operations Division


2000 MODEL YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: DaimlerChrysler Corp. Exh Eng Fam: YCRXA0360H32 Evap Fam: YCRXE0101G3H
Manufacturer: Dannier Chryster Gold: Day Sold Sold Sold Sold Sold Sold Sold Sold
Exh Std: CA Tier-1 TLEV LEV _XULEV SULEV US: EPA Tier-1 NLEV
Exh Std: CA Her-1 TLEV LEV A OLLV SOLLV MDV3 MDV4 MDV5
Veh Class(es): PCLDT1LDT2MDV1MDV2 _X _MDV3MDV4MDV5
Single Cert Std for Multi-Class Eng Fam: N/A (Specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)
Fuel Type(s): Dedicated X Flex-Fuel Dual-Fuel BI-Level Gasoline A Diesel
CNG ING IPG M85 E85 Other(specify)
Emis Tost Fuel(e): Indo CRG X CNG LPG M85 E85 Other(specify)
Diesel: 13 CCR 2282 40 CFR 86.113-90 40 CFR 86.113-94
Evaporative Emission Test Procedure: California Federal X
Service Accuming Std AMA Mod AMA X Mfr ADP Utner(Specify)
NMOG Test Procedure: N/A Std Equiv X R/L Test Proc. SHEDPt Source
Engine Configuration: V-8 Displacement 5.9 Liters 360 Cubic Inches
Velves not Cylindor: 2 Pated Horsepower: 745 (0) 4000 RPW
Engine: Front X Rear Drive: FWD RWD X 4WD-FT X 4WD-PT X
Engine: Front X Real Brive: 1710 HO29(2) TMC SEL
Exhaust ECS (eg. EGR, MFI, TC, CAC): HO2S(2), TWC, SFI,
(use abbreviations per SAE J1930 JUN93)

Engine Code (also list CA/49ST/50ST)	Vehicle Models (if coded see attachment)	Trans. Type M5 A4	eTW or Test Wt.	DPA Or RLHP	Ignition (ECM/PCM) Part No.	EGR System Part No.	Catalyst Converter Part No.
CA-100 CA	DN1L74	A4	5250	⊗ ⊞	56040408AB		52103374AA
CA-200 CA	DN5L74		5500	A T T A	56040408AB		52103373AA
CA-300 CA	AN5L84		5500	H M E N T	56040406AB		52103268AC
						_	

Date Issued: 07/3	22/99					
Povicione:	ĺ	1 1	l		<u></u>	

Certificate #:	California Sales YES YES
Engine Family: YCRXA0360H32 Evaporative Fam: YCRXE0101G3H	Car Line Dakota Pickup 4WD Dodge Durango 2WD SUV Dodge Durango 4WD SUV
Vehicle MFR: CHRYSLER	Model ID AN5L84 DN1L74 DN5L74

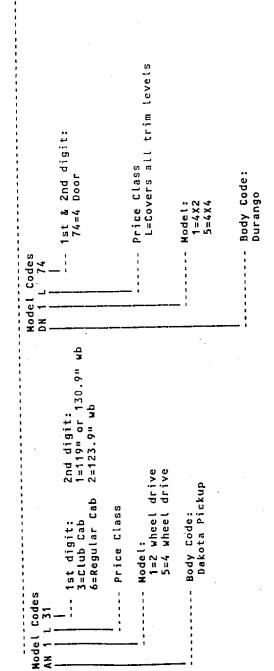

Report Date: 07/23/99

Chrysler Corporation Family Tire Usage

2000 YCRXA0360H32

	_
	WEIGH
	VEHICLE
,	LOADED

		•	;	1		LOADED VEHICLE WEIGHT	ADJUSTED LOADED VEHICLE WGT
NODEL ENG TRANS C GVW TYPE ETW	. LVW	COAST TIRE DESCRIPTION DOWN ' USE YR COD MFG OPI TIME	COAST DOWN *		TIRE PRES F R	COLD CO ELECTRIC DYNO COEFFICIENTS TARGET A B C (LINE 1 IS 20 DEG COEFFS, LINE 2 IS 50 DEG WHEN NEEDED)	COAST TIRE ALVA DOAN *DYNO PRES ETH TIME HP F R
ANSL84 EML DGT 4W Y 6010 C 5000	2000	STD 00 1S2 1ZA 12.17	12.17 16.0 35 35	16.0	35 35		12.75
		OPT 00 TUT TZA	12.31 14.7 35 35	14.7	35 35		12.94 13.6 35 35
DN11.74 EML DGT RM Y 6050 C 5000	2000	STD 00 1S2 TZA	14.38	.38 12.6 35 35	35 35		5250 14.62 11.6 35 35
		0РТ 00 ТSC ТZH	15.32	.32 12.2 35 35	35 35		15.85 12.0 35 35
DN5174 EML DGT 4W Y 6400 C 5250	5250	STD 00 TSZ TZA	12.65	.65 14.2	35 35	53.47 0.04553 93.91 0.04553 e. 77 0.03844	5500 13.17 13.0 35 35
		OPT 00 TUT TZA	13.01	.01 14.5 35 35	35 35	84.51 0.04401 76.83 0.04001	13.37 13.3 35 35

/ 10. - 1306 - 400 /

Report Date: 06/05/99 Time: 07:41:21

* - For DYNO HP = 0.00 Ref To FRONTAL AREA

_	PTION
6	4
Ξ	ē
rporation	Š
ē	Ē
និ	ä
er	1011 /
76	
7	LAMA
유	4

2000 YCRXA0360H32

TREAD DEPTH (IN.)	1/32	ស្តេស
4	→ →	000
<u>α</u> .	L OVERLAY Y MATERIAL	2 None 2 None 2 None
۵	L Y SW SYDEWALL MATERIAL	4 OWL Polyester 4 BSW Polyester 4 OWL Polyester
	CONSTRUCTION L LOVERLAY RPM COD TREAD MATERIAL Y SW SYDEWALL MATERIAL Y MATERIAL	
	SIZE	P235/75R15-XL P235/75R15-XL 31X10.5R15 C
	TIRE DESCRIPTION YR COD NFG OPT NAME	00 TSZ TZA WRANGLER RT/S (A/T) 00 TSC TZH XW4 (A/S) 00 TUT TZA WRANGLER RT/S (A/T)

Report Date: 06/05/99 Time: 07:41:21

/ 107 - 1306 - 401 /